


Stûv 16 - Dimensions

stûv

Presentation 1 - 2 - 3 - 4 | Accessories 1 - 2 | [Dimensions](#) | Achievements | Technical documents

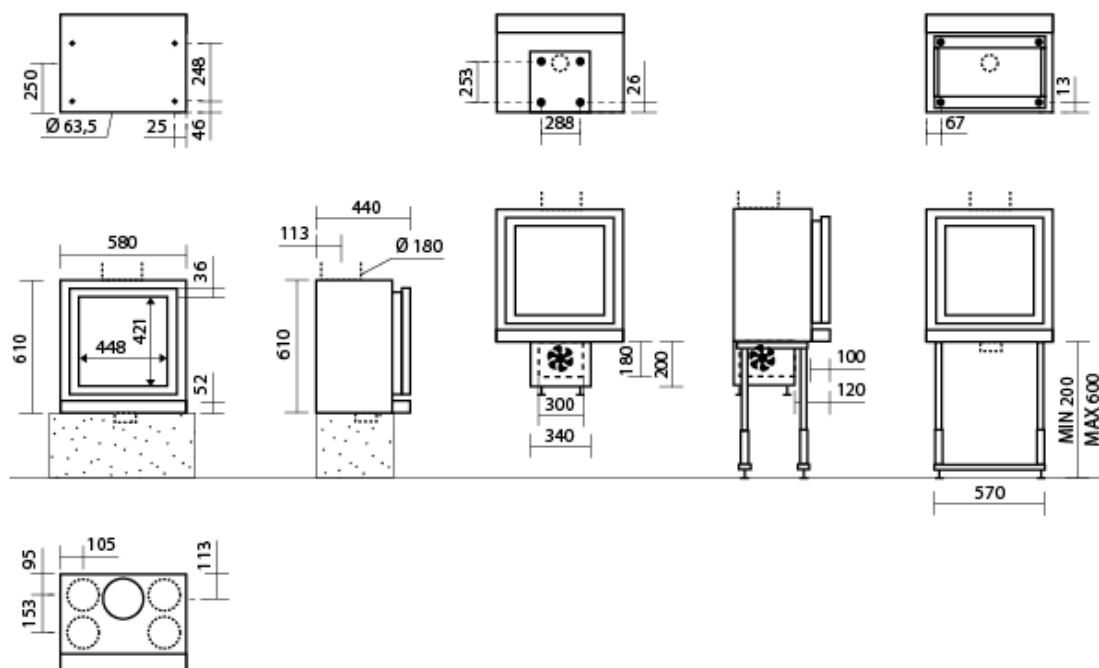

Optimum range of use: 6 -> 9 KW

Consumption range in wood/hour at 12% humidity (given as a guideline): 2,0 -> 2,9 Kg/h

Weight: 91 kg

Standard smoke exit diameter:


Stûv reserve the right to implement product modifications without notice. Measurements are within 3mm tolerance.

WWW.STUV.BE © 4-2008

Stûv 16 - Dimensions

stûv

Presentation 1 - 2 - 3 - 4 | Accessories 1 - 2 | [Dimensions](#) | Achievements | Technical documents

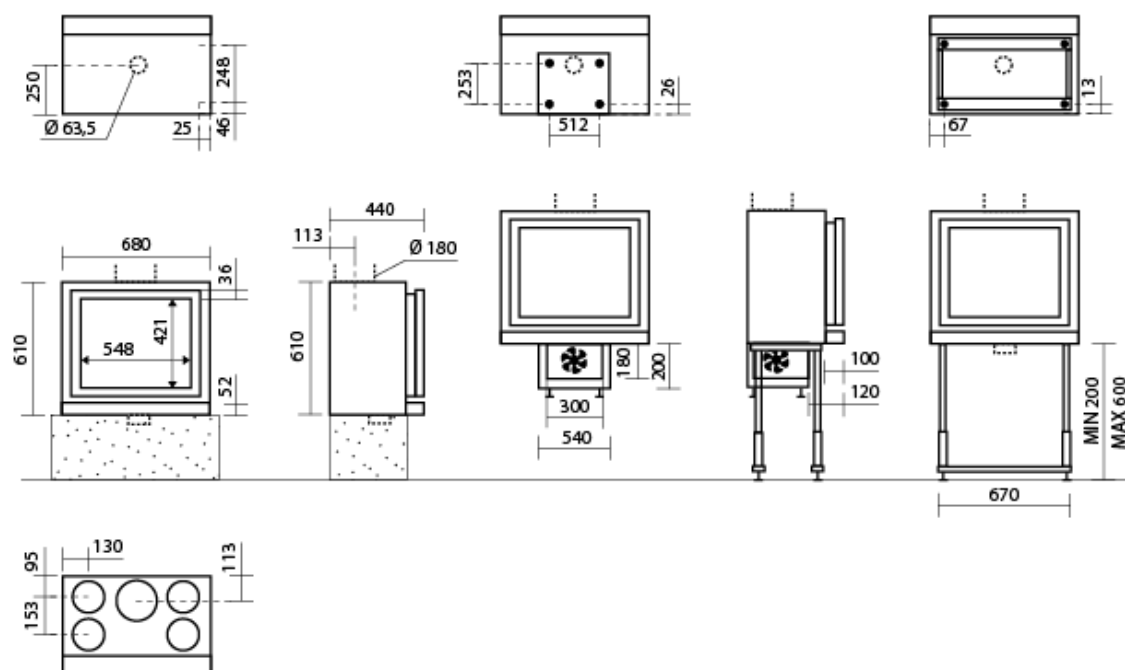

Optimum range of use: 7 -> 11 KW

Consumption range in wood/hour at 12% humidity (given as a guideline): 2,3 -> 3,6 Kg/h

Weight: 102 kg

Standard smoke exit diameter:


Stûv reserve the right to implement product modifications without notice. Measurements are within 3mm tolerance.

WWW.STUV.BE © 4-2008

Stûv 16 - Dimensions

stûv

Presentation 1 - 2 - 3 - 4 | Accessories 1 - 2 | [Dimensions](#) | Achievements | Technical documents

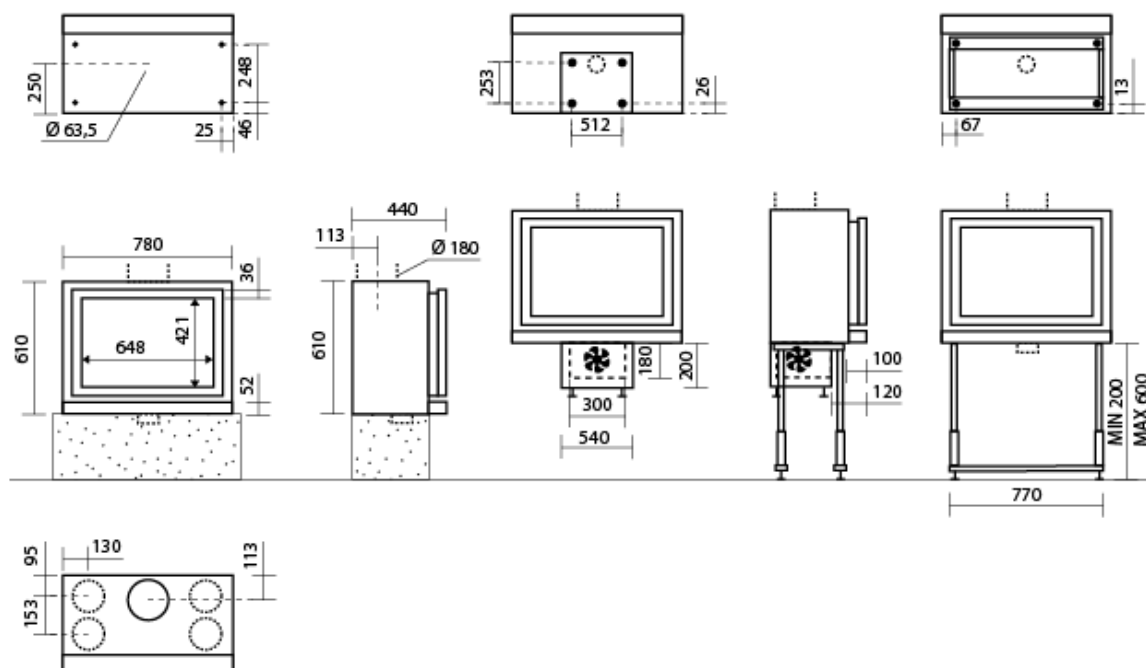

Optimum range of use: 8 -> 12 KW

Consumption range in wood/hour at 12% humidity (given as a guideline): 2,6 -> 3,9 Kg/h

Weight: 112 kg

Standard smoke exit diameter:

Stûv reserve the right to implement product modifications without notice. Measurements are within 3mm tolerance.

WWW.STUV.BE © 4-2008