


Stûv 21 - Dimensions 21/125 single face

stûv







Presentation 1 - 2 - 3 - 4 | Accessories | [Dimensions](#) | Achievements | Technical documents



Part-raise
& Low outlet:



Full raise
& High outlet:

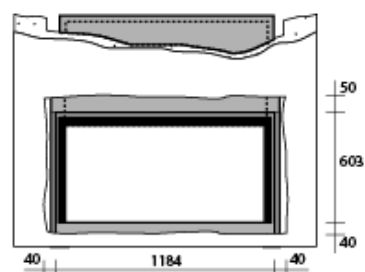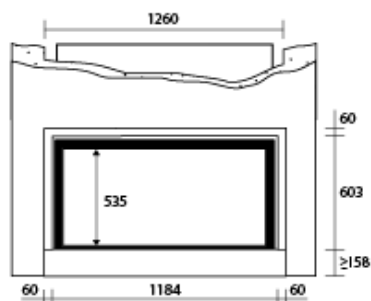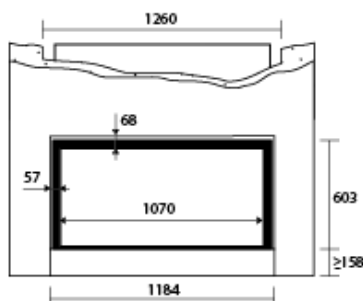

Gap for frame and counter-frame fitting.

Optimum range of use: 11 -> 21 KW

Consumption range in wood/hour at 12% humidity (given as a guideline): 3,2 -> 6,1 Kg/h

Weight: 305 kg

Standard smoke exit diameter: 300

Stûv reserve the right to implement product modifications without notice. Measurements are within 3mm tolerance.

WWW.STUV.BE © 4-2008

Stûv 21 - Dimensions 21/125 double face


stûv

Presentation 1 - 2 - 3 - 4 | Accessories | [Dimensions](#) | Achievements | Technical documents



Part-raise
& Low outlet:

relevé total
avec sortie haute:

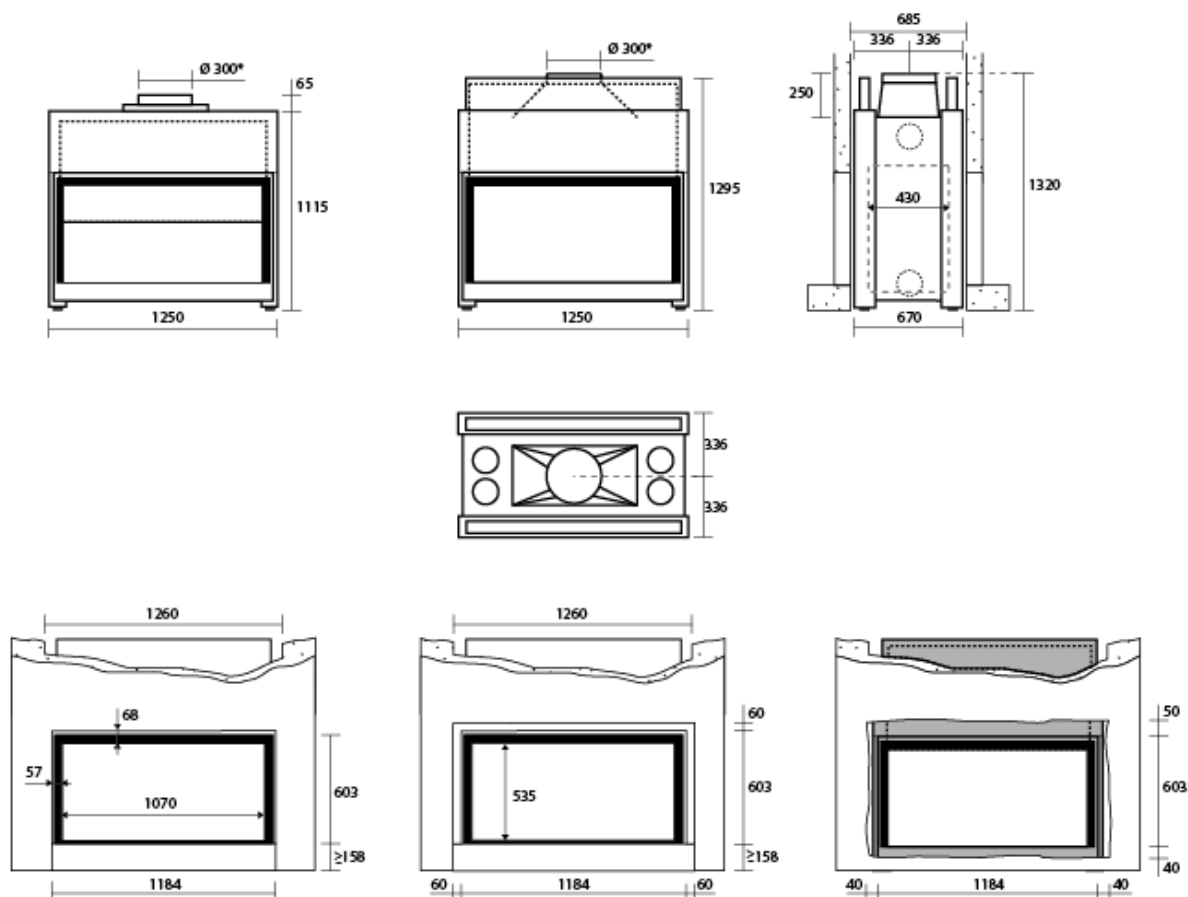

Gap for frame and counter-frame fitting.

Optimum range of use: 11 -> 23 KW

Consumption range in wood/hour at 12% humidity (given as a guideline): 3,9 -> 8 Kg/h

Weight: 310 kg

Standard smoke exit diameter: 300

Stûv reserve the right to implement product modifications without notice. Measurements are within 3mm tolerance.

WWW.STUV.BE © 4-2008